

SITE ELECTRICS



AXIOM SITE ELECTRICS

The Axiom Site Electric range comprises portable transformers, extension reels and outlet units, multi-way adaptors, industrial plugs and sockets plus a comprehensive array of site lighting. Bulkheads, yellow low voltage anti-corrosive fittings, inspection lamps, task lights, portable floods, festoon lighting and tripods make up this sub-sector. Benefiting from CED's expertise with the Meridian LED Lighting range, LED single and twin tripods and portable LED site lights have been added to this Axiom range. All products are CE marked and meet all relevant BS EN standards.



Use GRP Moulded Transformers to directly convert 240v to 110v for a safer site working environments



Dimensions (mm)
240 x 190 x 260



Code: P7/1

750vA 16A Single Socket 110v

- A robust range of GRP moulded Portable Transformers suitable for heavy duty site use
- Step down from 230v to 110v CTE supply
- Provides isolation from mains
- Rubber cable 13A 240v Plug
- 110v BS EN60309 Outlet Sockets
- Overload protected by input thermal device, centre tapped to earth
- Commonly used with construction and industrial power tools

Minimum / Box quantity: 1

Minimum order quantity: 1

LOWEST PRICE

Each

10+

IP54

110v

YEL

All products are CE marked and manufactured to meet the very high standards required by construction and structural engineers. The range is designed to provide the widest possible versatility, whilst being both robust and durable to meet CED's standards of high quality and excellent value for money.



P50/3

IP
54

1x
16A

P30/2

IP
54

2x
16A

1x
32A

Features & Benefits

- A robust range of GRP moulded Portable Transformers suitable for heavy duty site use
- Step down from 230v to 110v CTE supply
- Provides isolation from mains
- Rubber cable 13A 240v Plug
- 110v BS EN60309 Outlet Sockets
- Overload protected by input thermal device, centre tapped to earth
- Commonly used with construction and industrial power tools



Product Specifications

	P10/1	P15/2	P20/2	P30/2	P50/3
General Information					
Product Colour	Yellow	Yellow	Yellow	Yellow	Yellow
Dimensions (mm)	240x190x260	280x190x260	260x210x285	260x210x285	365x345x340
Ingress Protection	IP54	IP54	IP54	IP54	IP54
Electrical					
Rating (vA)	1000(vA)	1500(vA)	2000(vA)	3000(vA)	5000(vA)
Continuous Application	600(vA)	900(vA)	1200(vA)	1650(vA)	2900(vA)
Input Voltage	230v	230v	230v	230v	230v
Output Voltage	110v	110v	110v	110v	110v
Socket/Outlets	1x16A	2x16A	2x16A	2x16A	2x16A + 1x32A
Cable	Rubber	Rubber	Rubber	Rubber	Rubber
Plug (240v)	13A	13A	13A	13A	13A
Approvals	CE	CE	CE	CE	CE
Construction					
Body	GRP Moulded	GRP Moulded	GRP Moulded	GRP Moulded	GRP Moulded
Weight	10Kg	11Kg	16.5Kg	26Kg	30.5Kg
Warranty	1	1	1	1	1
Min/box	1	1	1	1	1
Each					
LOWEST PRICE 10+					

Minimum order quantity: 1

* to BS EN60309

REELS

Portable Extension Reels (110v or 240v)



Dimensions (mm)
320(H) x 230(W) x 180(D)



Code: WCR251

25Mtr 110v Cable Reel 2 Outlets

- 25Mtrs 3 core 1.5mm² Yellow VDE approved cable with 110v Yellow approved plug
- Heavy duty robust steel frame for longer life and easy winding
- 600W (fully reeled) 1875W (fully opened)
- Artic Yellow cable used in 110v (VDE approved)

Minimum / Box quantity: 2


Minimum order quantity: 1



Each		
IP20	110v	BLK



Dimensions (mm)
390(H) x 280(W) x 190(D)



Code: WCR501

50Mtr 110v Cable Reel 2 Outlets

- 50Mtrs 1.5mm² 3 core Yellow VDE approved cable with 110v Yellow approved plug
- Heavy duty robust steel frame for longer life and easy winding
- Artic Yellow cable used in 110v (VDE approved)
- Dimensions: 379 x 237 x 110mm

Minimum / Box quantity: 2

Minimum order quantity: 1



Each		
IP20	110v	BLK



Dimensions (mm)
n/a



Code: WCR252

25Mtr 240v Cable Reel with 2 Outlets

- 25Mtr Industrial Extension Reel 240v with metal frame
- Fitted with 13Amp 3 pin plug-top (BS1363) / 2 Socket Outlets
- Heavy duty robust steel frame for longer life and easy winding
- 1mm² Cable 10Amp 2.4kW (unwound) 1kW (wound)

Minimum / Box quantity: 2

Minimum order quantity: 1



Each		
IP20	240v	BLK



Dimensions (mm)
n/a



Code: WCR502

50Mtr 240v Cable Reel with 2 Outlets

- 50Mtr Industrial Extension Reel 240v with metal frame
- Fitted with 13Amp 3 pin plug-top (BS1363) / 2 Socket Outlets
- Heavy duty robust steel frame for longer life and easy winding
- 1.5mm² Cable 13Amp 3kW (unwound) 1kW (wound)

Minimum / Box quantity: 2

Minimum order quantity: 1



Each		
IP20	240v	BLK



SJB41C/240

SJB41C

SJB41C/GRP

OUTLETS

Extension Outlets (Metal or GRP Moulded)

Features & Benefits

- Fitted with BS4343 (IEC60309) Sockets
- Polyester Epoxy Coated Steel Case
- Fitted with 4x16A 110v
- 3 Pin Socket
- Step down from (straight socket) 230v to 110v CTE supply
- Overload protected by input thermal device, centre tapped to earth
- Commonly used with construction and industrial power tools



Compliant to
IET 421.1.201

Product Specifications

	SJB41C	SJB41C/240	SJB41C/GRP
General Information			
Product Colour	Yellow	Blue	Yellow
Dimensions (L)x(W)x(H) mm	250x 170x 260	250x 170x 260	220x 210x 240
Ingress Protection (IP)	IP44	IP44	IP44
Electrical			
Input Voltage (V)	240v	240v	240v
Output Voltage (V)	110v	240v	110v
Socket/Outlets	4x16A	4x16A	4x16A
Cable	5Mtrs Yel 3x2.5mm ²	3 Core 2.5mm ²	5Mtrs 3x2.5mm ²
Plug	110v Plug	240v Plug	110v Plug
Approvals	CE	CE	CE
Construction			
Body	Steel (painted)	Steel (painted)	Steel (painted)
Weight	3.4Kg	3Kg	2.5Kg
Warranty (Years)	1	1	1
Min/box	1/1	1/1	1/1
Each			

Minimum order quantity: 1

LEADS

Extension Lead & Industrial Plug Converters

Extension Leads (c/w Plug & Connector)

- Manufactured from Artic Grade 3 Core Flex
- Yellow 110v / Blue 240v
- Each Lead fitted with Plug & Connector 110v 16A
- 3 Pin to IEC60309



Industrial Plug Converters

- BS EN60309-2 & CEE17
- 13A Plug & Socket to BS approval
- Available in 16A 3 Pin IP44 Splash Proof



Product Specifications

	SEL1415	SEL1425	SEL1425/32	SEL1425/240	FL1613	FL1316
General Information						
Product Colour	Yellow	Blue	Yellow	Blue	Blue	Blue
Dimensions (L)x(W)x(H) mm	220x270	250 x 170 x 260	250 x 170x 260	250 x 170x 260	n/a	n/a
Ingress Protection (IP)	IP44	IP44	IP44	IP44	IP44	IP44
Electrical						
Coupler	16A 3 Pin Yellow	16A 3 Pin Blue	16A 3 Pin Yellow	16A 3 Pin Blue	16A 3 Pin Blue	16A 3 Pin Blue
Continuous Application (vA)	Yes	Yes	Yes	Yes	Yes	Yes
Input Voltage (V)	110v	240v	110v	240v	240v	240v
Output Voltage (V)	110v	240v	110v	240v	240v	240v
Socket/Outlets	4x16A	4x16A	n/a	n/a	Rubber 1 Gang	Rubber 1 Gang
Cable (VDE approved)	14Mtr Yel 3x1.5 ² mm	5Mtr Blu 3x2.5 ² mm	5Mtr Yel 3x2.5 ² mm	25Mtr Blu 3x2.5 ² mm	25cm Blu 1.5 ² mm	35cm Blu 1.5 ² mm
Plug	16A 110v Yellow Plug	16A 240v Blue Plug	16A 110v Yellow Plug	16A 240v Blue Plug	13A Plug BS approved	16A 240v Blue Plug
Approvals	VDE, CE to IEC60309	n/a	n/a	n/a	BS EN60309-2 & CEE17	BS EN60309-2 & CEE17
Construction						
Weight	1.8Kg	3Kg	3.4Kg	3Kg	500g	500g
Warranty (Years)	1	1	1	1	1	1
Min/box	1/6	1/6	1/6	1/6	n/a	n/a
Each		£ 14.25				

Minimum order quantity: 1



PLUGS

Watertight Industrial Plugs (63A 3 Pin 415v)


- BS EN60309-2 & CEE17
- Couplers with Grommet Entry
- Available in 16A 3 Pin IP44 Splash Proof



CE



Dimensions (mm)
320(H) x 230(W) x 180(D)



Code: **IP1623/67**
16A 3 Pin Industrial Plug 240v IP67

Minimum / Box quantity: 1/10
Minimum order quantity: 1

Each

CE



Code: **IC1623/67**
16A 3 Pin Industrial Coupler 240v IP67



Dimensions (mm)
390(H) x 280(W) x 190(D)



Minimum / Box quantity: 1/10
Minimum order quantity: 1

Each

CE



CONNECTORS


Industrial Connectors (16A - 32A)

Features & Benefits

- BS EN60309-2 & CEE17
- Available in 16A 3 Pin IP44 Splash Proof
- QF codes indicate - Quick Fit Plug



Approvals:
BS EN60309-2 & CEE17



3 Way Adaptors

Code	Description	Min/Box	Each
IAP3/110	3 Way Adaptor Yellow 110v	1/2	
IAP3/240	3 Way Adaptor Blue 240v	1/2	



Product Specifications



IC1613QF	IC1623QF	IC3213	IC3223	IC1644	IC1645	IC3244	IC3245
----------	----------	--------	--------	--------	--------	--------	--------

General Information

Product Colour	Yellow	Blue	Yellow	Blue	Red	Red	Red	Red
Ingress Protection	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44

Electrical

Coupler	2P+E	2P+E	2P+E	2P+E	3P+E	3P+E	3P+E	4P+E
Rating (vA)	16A	16A	32A	32A	16A	16A	32A	32A
Input Voltage	110v	240v	110v	240v	415v	415v	415v	415v
Output Voltage	110v	240v	110v	240v	415v	415v	415v	415v
Plug	2P+E	2P+E	2P+E	2P+E	3P+E 4 Pole	4P+E 4 Pole	3P+E 4 Pole	4P+E 4 Pole


Construction

Body	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded
Weight	150g	150g	150g	150g	175g	175g	175g	175g
Warranty	1	1	1	1	1	1	1	1
Min/box	1/10	1/10	1/10	1/10	1/10	1/10	1/10	1/10

Each

Minimum order quantity: 1

110/415v
VOLTAGE





PLUGS

Industrial Plugs (16A - 32A)


Features & Benefits

- BS EN60309-2 & CEE17
- Couplers with Grommet Entry
- Available in 16A 3 Pin IP44 Splash Proof
- QF codes indicate - Quick Fit Plug



Approvals:
BS EN60309-2 & CEE17

110/415v
VOLTAGE



Product Specifications



IP1613QF	IP1623QF	IP3213	IP3223	IP1644	IP1645	IP3244	IP3245
----------	----------	--------	--------	--------	--------	--------	--------

General Information

Product Colour	Yellow	Blue	Yellow	Blue	Red	Red	Red	Red
Ingress Protection	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44

Electrical

Rating (vA)	16A	16A	32A	32A	16A	16A	32A	32A
Input Voltage	110v	240v	110v	240v	415v	415v	415v	415v
Output Voltage	110v	240v	110v	240v	415v	415v	415v	415v
Plug	2P+E	2P+E	2P+E	2P+E	3P+E 4 Pole	4P+E 4 Pole	3P+E 4 Pole	4P+E 4 Pole

Construction

Body	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded
Weight	100g	100g	n/a	n/a	n/a	n/a	n/a	n/a
Warranty (Years)	1	1	1	1	1	1	1	1
Min/box	1/10	1/10	1/10	1/10	1/10	1/10	1/10	1/10

Each								
100+								

Minimum order quantity: 1

SOCKETS

Industrial Sockets (16A - 32A)



Features & Benefits

- BS EN60309-2 & CEE17
- Gland Entry
- IP44 Splash Proof




Panel Sockets

Code	Description	Min/Box	Each
IPS1613	Panel Socket 16Amp 3P 110v	1/10	1.34
IPS1623	Panel Socket 16Amp 3P 240v	1/10	1.34



Approvals:
BS EN60309-2 & CEE17

110/415v
VOLTAGE



Product Specifications



IAS1613	IAS1623	IAS3213	IAS3223	IAS1644	IAS1645	IAS3244	IAS3245
---------	---------	---------	---------	---------	---------	---------	---------

General Information

Product Colour	Yellow	Blue	Yellow	Yellow	Red	Red	Red	n/a
Dimensions (Ø) x (L) mm	50 x 120	50 x 120	50 x 120	50 x 120	50 x 120	50 x 120	50 x 120	50 x 120
Ingress Protection (IP)	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44

Electrical

Rating (vA)	16A	16A	32A	32A	16A	16A	32A	32A
Input Voltage	110v	240v	110v	240v	415v	415v	415v	415v
Socket	2P+E	2P+E	2P+E	2P+E	3P+E 4 Pole	3P+E 4 Pole	3P+E 4 Pole	4P+E 4 Pole

Construction

Body	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded	Moulded
Weight	150g	150g	150g	150g	175g	175g	175g	175g
Warranty	1	1	1	1	1	1	1	1
Min/box	1/10	1/10	1/2	1/2	1/10	1/10	1/10	1/10
Each								

Minimum order quantity: 1

Features & Benefits

These tripod mounted plasterers lights emit light which produces no shadows, they are ideal for plasterers, painters and decorators, as they facilitate the finishing of a smooth, fault-free surface. They come in two versions which can be easily moved around a site and quickly placed wherever needed. The light can be set in the horizontal or vertical position.

Whilst the TPD218FOLD is better suited to more enclosed and tighter environments. Both versions are fitted with a twin 16A 110v sockets suitable for a power tools.

Other Features include

- GRP body providing protection from moisture, dirt, grease and UV radiation
- Clear prismatic polycarbonate diffuser
- Provides even light distributions for superior finishing
- Easily adjustable extra stable tripod



Code: TPD158

Plasterers Tripod Light IP65 1x58W c/w Twin Socket & Plug

- 5Mtrs 3 Core 1.5mm² VDE approved Yellow
- Cable with 16A 3 Pin 110v approved Plugs
- 2x16A 110v Socket for Interlink
- Spare Clip (included)
- 1 x 58W IP65 Anti Corrosive Yellow Fitting
- 5' 58W T8 Tube (not included)
- Yellow Extra Stable Steel Tripod

TUV CE



Min/Box quantity: 1

Minimum order quantity: 1

IP65 110v


Each 10+

Dimensions:

800(B) x 2060(H)mm Approvals: (BS EN60309-2 & CEE17)

LIGHTING

Plasterers Tripod & Folding Work-lights (IP54/IP65)



Dimensions:
580(B) x 920(H) x 300(W) mm



Code: TPD218FOLD

Plasterer Tripod 110v 2 x 18W Folding Type with Twin Socket 5Mtr Cable

- 5Mtrs 3 Core 1.5mm² Yellow Cable with 16A 3 Pin 110v approved Plugs
- 2 x 16A 110v Socket for Interlink / 2 x 18W IP65 Anti Corrosive Fitting
- 2 x 18W Lamps (not included)

Min/Box quantity: 1

Minimum order quantity: 1

Each

TUV CE

IP65 110v I



Dimensions:
580(B) x 920(H) x 300(W)mm



Code: TPD230LED/FOLD

2ft 30W Plasterers Tripod Single 2600Lm 2x110v 16A Outlets 5m Folding

- Aluminium body / Black/Yellow finish with glass diffuser
- Output 2600Lm / 86Lm per watt
- LED Type Dedicated-SMD / 6500K

Min/Box quantity: 1

Minimum order quantity: 1

Each

TUV CE

IP54 110v

Code: TPD544LED

20W LED Work Light

- Impact resistant plastic case, tough Nylon PC diffuser with carry handle
- Output 1800Lm / 90Lm per watt
- LED Type Dedicated-SMD / 6500K



Dimensions:
655x265x305/6mm

Min/Box quantity: 1

Minimum order quantity: 1

Each

CE RoHS

IP54 240v

LIGHTING

Anti-Corrosive Fittings GRP 110v

Features & Benefits

- GRP body provides protection from moisture, dirt, grease and UV radiation.
- Clear prismatic polycarbonate diffuser.
- 110v magnetic ballast as standard, also available with 3 hour emergency pack.
- T8 tube lighting (not included)
- VDE approved lampholder.
- Optional metal clips available for security.
- IP65 suitable for outdoor use in car parks, train stations, warehouses and other industrial places (for site use).
- Magnetic version with easy connection.

1x58W - Yellow

- Fitted with a starter, ballast and TÜV safety approved 30µF capacitor.

2x18W - Yellow

- Fitted with 2 starters, 2 TÜV approved ballasts and TÜV safety approved 20µF Capacitor.



AC158/1YEL

AC218/1YEL

Product Specifications

General Information

Colour/Finish

Yellow

Yellow

Dimensions

1570x100x110mm

660x450x110mm

Fixing Centre

1180mm

420mm

Ingress Protection

IP65

IP65

Electrical

Operating Voltage

110v

110v

Wattage

58W

18W

Approvals

CE

CE

Class

I

I

Performance Data

Lamp Type

T8

T8

Construction

Body

GRP

GRP

Diffuser Material

Clear PC

GRP Clear PC

Weight (Kg)

n/a

n/a

Min/box

1/4

1/4

Each

LOWEST PRICE

10+

LIGHTING

Anti-Corrosive Fittings GRP 110v

Features & Benefits

- Yellow 110v VDE approved Yellow Cable and Plug
- "CE" (TÜV-GS) approved



Dimensions (mm)
n/a

NEW

Code: AC220/1YEL

2ft Twin LED 20W Anti Corrosive 110v 1800Lm PC/PC-Opal Diffuser

- Polycarbonate body / Yellow finish with PC Opal diffuser
- Output 1800Lm / 90Lm per watt
- LED Type LED / 6500k



Minimum / Box quantity: n/a

Minimum order quantity: 1

Each



Dimensions (mm)
1565x130x92mm

NEW

Code: AC560/1YEL

5ft Twin LED 60W 110v 5400Lm PC/PC Opal Yellow Body IP65

- Polycarbonate body / Yellow finish with PC Opal diffuser
- Output 5400Lm / 90Lm per watt
- LED Type LED / 6500k



Minimum / Box quantity: n/a

Minimum order quantity: 1

Each



Dimensions (mm)
1565x130x92mm

NEW

Code: AC560/1YEL/EM3

5ft Twin LED 60W 110v 5400Lm PC/PC Opal Yellow Body IP65 EM3

- Polycarbonate body / Yellow finish with PC Opal diffuser
- Output 5400Lm / 90Lm per watt
- LED Type LED / 6500k



Minimum / Box quantity: n/a

Minimum order quantity: 1

Each

FLOODLIGHTS


Tripod Site Floodlighting 110v

Features & Benefits

- Light Source:- Bridgelux LED Chip
- Frequency Range:- 50Hz~60Hz
- Input Voltage:- 230V or 12.6V
- Power Factor:- >0.9
- Power Efficiency:- >87%
- LED Luminous Efficiency:- 90-100Lm/W
- Comes with in-car charger
- Ingress:- IP65 and IP44



* Lumen output is approximate for these units.
 ** Applications - Harbour, Tower, Parking Area, Sports Stadium & Tall Buildings

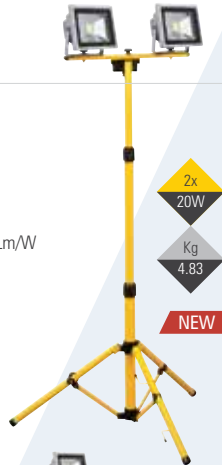

NEW

Code: **ST220TW**

40W LED Twin Floodlight 2x20W 3600lm 3 x Mtr Cable IP54 (with Tripod)

- Aluminium body / Black/Yellow finish with glass diffuser
- Output 3600Lm / 90Lm per watt / Beam Angle 115°
- LED Type DOB-SMD / 28pcs / 6500k


Min/Box quantity: 1

Minimum order quantity: 1

Dimensions:
1220 x 55 x 1788mm



Each		
IP54	240v	I



NEW

Code: **ST20SN**

20W LED Single Floodlight 1800lm 3 x Mtr Cable IP54 (with Tripod)

- Aluminium body / Black/Yellow finish with glass diffuser
- Output 1800Lm / 90Lm per watt / Beam Angle 115°
- LED Type DOB-SMD / 28pcs / 6500k

Min/Box quantity: 1

Minimum order quantity: 1

Dimensions:
1070 x 55 x 1790mm



Each		
IP54	240v	I



Dimensions:
820(B) x 2000(H)mm



Code: **ST500T**

Tripod 500W - Twin 110v c/w Lamp

- Yellow Telescopic Stand (height adjustable 0.8-2Mtrs) with easy fast lock pin for open or folded position, can rest in two positions
- 2x500W Black Diecast Floodlight c/w rust proof Chrome Wire Guard

Min/Box quantity: 1/4

Minimum order quantity: 1

Each	10 +



IP54	110v	I
------	------	---



Dimensions:
820(B) x 2000(H)mm



Code: **ST500S**

Tripod 500W - Single 110v c/w Lamp

- Yellow Telescopic Stand (height adjustable 0.8-2Mtrs) with easy fast lock pin for open or folded position, can rest in two positions
- 1x500W Black Diecast Floodlight c/w rust proof Chrome Wire Guard

Min/Box quantity: 1

Minimum order quantity: 1

Each	10 +



IP54	110v	I
------	------	---

Features & Benefits

- Highly efficient 10W Epistar COB chip for superior performance
- Fully portable and comes with in-car charger
- 2.5 hours working life and 6-7 hours charge time
- 14.8v/4400mah battery
- Ingress:- IP44



Suitable for
'Site Use, Car Parks, Warehouses
& Camping'

LIGHTING

Portable Re-Chargeable Site Lights



Code: RCLED10TPD

10W LED Portable Re-Chargeable Site Light (with Stand)

- Diecast Aluminium body / Black/Yellow finish with glass diffuser
- Output 650Lm / 130Lm per watt / Beam Angle 110°
- Epistar COB LED Chip / 6500k / 230v or 12.6v DC



Min/Box quantity: 1

Minimum order quantity: 1

Dimensions:
145.5 x 235 x 115mm

CE RoHS

Each		
IP44	240v	I



Code: RCLED20TPD

20W LED Portable Re-Chargeable Site Light (with Stand)

- Diecast Aluminium body / Black/Yellow finish with glass diffuser
- Output 1300Lm / 26Lm per watt / Beam Angle 110°
- Epistar COB LED Chip / 6500k / 230v or 13v DC

Min/Box quantity: 1

Minimum order quantity: 1

Dimensions:
240x275.5x200mm

CE RoHS

Each		
IP44	110v	I



Code: RCLED30TPD

30W LED Portable Re-Chargeable Site Light (with Stand) Die-cast Aluminium

- Diecast Aluminium body / Black/Yellow finish with glass diffuser
- Output 2000Lm / 67Lm per watt / Beam Angle 110°
- Epistar COB LED Chip / 6500k / 230v or 12.6v DC

Min/Box quantity: 1

Minimum order quantity: 1

Dimensions:
308 x 294 x 209mm

CE RoHS

Each		
IP54	110v	I

Approvals:
(BS EN60309-2 & CEE)


LIGHTING

Portable Work Lights & Task Lights (110v/240v)

NEW

TUV  CE

Dimensions:
238.5 x 67.8 x 264mm



Code: **FWL20**

20W Folding Worklight Aluminium/PC Frame 1.8m 1800Lm IP54

- Aluminium body / Black/Yellow finish with glass diffuser
- Output 1800Lm / 90Lm per watt / Beam Angle 115°
- LED Type DOB-SMD / 28pcs / 6500k

Min/Box quantity: 1

Minimum order quantity: 1

IP54	240v	I
------	------	---

Each

NEW

CE RoHS

Dimensions:
318.5 x 76 x 308mm



Code: **FWL50**

50W Folding Worklight Aluminium/PC Frame 1.8m 4500Lm IP54

- Aluminium body / Black/Yellow finish with glass diffuser
- Output 4500Lm / 90Lm per watt / Beam Angle 115°
- LED Type DOB-SMD / 70pcs / 6500k

Min/Box quantity: 1

Minimum order quantity: 1

IP54	110v	I
------	------	---

Each

TUV  CE

Dimensions:
330(L) x 240(W) x 120(D)mm



Code: **TL38/110 & TL38/240**

2D 38W Electronic Control Gear (for flicker free switching)

- Black Body & Polycarbonate Clear Diffuser
- Black handle for easy carrying / Stable to use on floor
- Key hole for Wall/Floor fixing / Cable storage facility at the back
- 3Mtrs 3x0.75mm² VDE approved Cable fitted with approved 110v Plug
- 38W 3500K Lamp (included)

Min/Box quantity: 1

Minimum order quantity: 1

TL38/240 - 240v version

IP44	110v	n/a
------	------	-----

Each	10+
------	-----

TUV  CE

Dimensions:
330(H) x 240(W) x 120(D)mm



Code: **TL28/110 & TL28/240**

2D 28W Electronic Control Gear (for flicker free switching)

- Black Body & Polycarbonate Clear Diffuser
- Black handle for easy carrying / Stable to use on floor
- Key hole for Wall/Floor fixing / Cable storage facility at the back
- 3Mtrs 3x0.75mm² VDE approved Cable fitted with approved 110v Plug
- 28W 3500K Lamp (included)

Min/Box quantity: 1

Minimum order quantity: 1

TL28/240 - 240v version

IP44	110v	n/a
------	------	-----

Each	10+
------	-----

NEW

CE

Dimensions:
273 x 243 x 136mm

Approvals:
(CE to IEC60309)



Code: **TL20LED/110**

20W Portable Task Light 1800Lm IK07 110v Cable & 110v Plug

- Impact resistant plastic case, tough Nylon PC diffuser / Handy carry handle
- Working Temperature: -20°C—55°C / Kinetic Impact Resistance: IK07
- Supplied with 3Mtr 0.75mm cable and fitted with 110v 16A plug (BS EN60309)

Min/Box quantity: 1

Minimum order quantity: 1

IP54	110v	I
------	------	---

Each



Dimensions:
190 x 235.5 mm

NEW Code: SHL30/1

30W SMD Hanging Lantern 2880Lm IK10 110v

- Black/Yellow finish
- Aluminium body with heat dissipation plate with Polycarbonate diffuser
- Output 2800Lm / 93.33Lm per watt / Beam Angle 360°
- LED Type LED 2835 / 150pcs / 6400k



Min/Box quantity: 1/10

Minimum order quantity: 1



Each
IP54
110v
I

LIGHTING

Dedicated LED Work Lights

NEW



Dimensions:
170 x 120 x 245mm

Code: RWL10RB

10W Rechargeable Portable Worklight 800Lm IP54

- Output 800Lm / 80Lm per watt / Beam Angle 110°
- LED Type SMD / 20pcs / 6400k / Aluminium body with glass diffuser
- Replaceable battery



Min/Box quantity: 1

Minimum order quantity: 1



IP54
12v
III

Each

NEW



Dimensions:
177 x 32 x 161mm

Code: RWL15/USB

15W Rechargeable Task Light 1200Lm IP54 (with USB)

- Complete with rechargeable Lithium Battery (3.7V/4400mAh)
- Fitted with dimmer switch 25%, 50%, 100% / Water tight plastic housing (IP54)
- OFF and ON button and USB input/output 5.0V/1.0A.
- Output 1200Lm / 80Lm per watt / Beam Angle 110°
- LED Type COB / 1pc / 6400k / Plastic body with glass diffuser



Min/Box quantity: 1

Minimum order quantity: 1



IP54
13v
III

Each

NEW



Dimensions:
225 x 135 x 295mm

Code: RWL20RB

20W Rechargeable Portable Worklight 1600Lm IP54

- Output 1600Lm / 80Lm per watt / Beam Angle 110°
- LED Type SMD / 40pcs / 6400k / Aluminium body with glass diffuser
- Replaceable battery



Min/Box quantity: 1

Minimum order quantity: 1



IP54
5v/DC
III

Each

NEW



Dimensions:
252 x 143 x 328.5mm

Code: RWL30RB

30W Rechargeable Portable Worklight 2400Lm IP54

- Output 2400Lm / 80Lm per watt / Beam Angle 110°
- LED Type SMD / 56pcs / 6400k / Aluminium body with glass diffuser
- Replaceable battery



Min/Box quantity: 1

Minimum order quantity: 1



IP54
14.5v
III

Each

LIGHTING

Inspection Lamps (110v/240v)



Code: IL100RC

100W BC Inspection Lamp - 240v

- Lamp Cap - 60/100W BC 240v
- 5Mtrs 3x0.752mm VDE approved Cable c/w 13A 3 Pin Moulded Fitted Plug
- Lamp 100W (not included)
- Black Rubber Base for lamp to rest on the floor



Dimensions:
120(Ø) x 280(L)mm

Min/Box quantity: 1/10

Minimum order quantity: 1

Each



IP20 240v n/a



Dimensions:
820(B) x 2000(H)mm



Code: IL12

Inspection Lamp

- Supplied with 5Mtrs PVC H05UV-F VDE approved Black Cable
- Electronic Circuit with Starter



Min/Box quantity: 1/10


Minimum order quantity: 1

IP20 240v n/a

Each



Dimensions:
115(Ø) x 240(L)mm



Code: IL60P

60W BC Inspection Lamp 240v

- Black Plastic / Lamp Cap - 60W BC 240v (lamp not included)
- 2x0.75mm² Black 5Mtrs VDE approved Cable c/w 13A 3 Pin Moulded Plug



Min/Box quantity: 1/10

Minimum order quantity: 1

IP20 240v n/a

Each



Dimensions:
820(B) x 2000(H)mm



Code: GL60HD/110

60W BC Inspection Lamp 110v Heavy Duty

- Body - Black Plastic
- Lamp 60W (not included) c/w - 16A 110v Plug



Min/Box quantity: 1/10

Minimum order quantity: 1

IP20 110v n/a

Each



Dimensions:
220x230x110mm



Code: GL60HD/240

60W BC Inspection Lamp 240v Heavy Duty

- Body - Black Plastic
- Lamp 60W (not included) c/w - 16A 110v Plug



Min/Box quantity: 1/10

Minimum order quantity: 1

IP20 240v n/a

Each

Approvals:
(CE to IEC60309)



LIGHTING

LED Uplights (110v/240v)

NEW



Suitable for
exterior and interior
use

Code: **UL18LED/110**

18W LED Uplight 2000Lm IK08 IP54 (with Tripod)

- Super bright SMD LED 2835 or T8 Fluorescent
- Impact-resistant PC lens glare free or T8 tube for impact-resistant PC transparent
- Powder coated metal frame / Retractable tripod for delivery and storage easily
- Detachable shoulder strap for carrying / Wired with 3Mtr cable and plug
- 360° circle without any dark spots (T8 LED tube for 120°)
- Kinetic Impact Resistance: IK08 / Working Temperature: -20°C~55°C
- Output 2000Lm / 111.11Lm per watt
- Type LED 2835 / 224pcs / 6400k / Metal body and tripod with glass Polycarbonate diffuser

IP54

110v

1

LED
18W

Kg
3.2

CE

Min/Box quantity: 1

Minimum order quantity: 1

Each

Dimensions:
980 x 870mm

NEW



Suitable for
exterior and interior
use

Code: **UL36LED/110**

36W LED Uplight 3600Lm IK08 IP54 (with Tripod)

- Super bright SMD LED 2835 or T8 Fluorescent
- Impact-resistant PC lens glare free or T8 tube for impact-resistant PC transparent
- Powder coated metal frame / Retractable tripod for delivery and storage easily
- Detachable shoulder strap for carrying / Wired with 3Mtr cable and plug
- 360° circle without any dark spots (T8 LED tube for 120°)
- Kinetic Impact Resistance: IK08 / Working Temperature: -20°C~55°C
- Output 3600Lm / 100.00Lm per watt
- Type LED 2835 / 336pcs / 6400k / Metal body and tripod with glass Polycarbonate diffuser

IP54

110v

1

LED
36W

Kg
3.6

CE

Min/Box quantity: 1

Minimum order quantity: 1

Each


Dimensions:
1285 x 870mm

LIGHTING

Festoon Set (IP44)



Dimensions:
25,000(L) x 10 x 2500(S)mm



Code: **FS10BCSET**

Festoon Set 25Mtrs Cable c/w 10 BC Lamps - 110v

- Lamps 2Mtr Spacing first lampholder at 5Mtrs
- Black Lampholder with wall fixing holed at each end / Yellow flat 2 Core 2.5mm² Cable
- Insulated termination cover at the end with the wall fixing facility
- Outdoor Lighting 110v c/w Lamps, Yellow Colour Plastic Guards and 110v Plug
- Can be connected up to 10 string providing transformer can support ampere output of the lighting
- Cable Length - 25Mtrs - CE BSEN 60598-2 approved



Min/Box quantity: 1

Each

10+

Minimum order quantity: 1

IP44

110v



Dimensions:
25,000(L) x 10 x 2,500(S)mm



Code: **FS10ESSET**

Festoon Set 25Mtrs Cable c/w 10 ES Lamps - 110v

- Lamps 2Mtr Spacing first lampholder at 5Mtrs
- Black Lampholder with wall fixing holed at each end / Yellow flat 2 Core 2.5mm² Cable
- Insulated termination cover at the end with the wall fixing facility
- Outdoor Lighting 110v c/w Lamps, Yellow Colour Plastic Guards and 110v Plug
- Can be connected up to 10 string providing transformer can support ampere output of the lighting
- Cable Length - 25Mtrs - CE BSEN 60598-2 approved



Min/Box quantity: 1

Each

10+

Minimum order quantity: 1

IP44

240v



Dimensions:
100,000(L) x 3,000(S)mm



Code: **FS100BC / FS100ES**

Festoon Set 100Mtrs Cable - 110v

- 100Mtrs Length 2.5mm² Artic Flexible Cable - Yellow
- Tough Moulded Lamp Holder
- 3Mtrs Spacing
- Suitable for 110v application
- Available in BC & ES Lamps



Min/Box quantity: 1

Each

10+

Minimum order quantity: 1

IP44

110v



Dimensions:
238.5 x 67.8 x 264mm



Code: **FGENC / FSGP**

FFGENG Festoon Guard Enclosed - Polycarbonate
FSGP Festoon Wire Guard - Polycarbonate

- Opal Shade - Polycarbonate
- Tough Moulded Lamp Holder - Yellow
- Suitable for use with FS100 and FS10 BC & ES Lamps



Min/Box quantity: 1/10

Each

FGENG

FSGP

Approvals:
(CE to IEC60309)

NEW USB FLOODLIGHT RFL20USB

(Rechargeable c/w Adaptor)

- Complete with foldable portable stand
- Rechargeable Li-battery
- With ON-OFF switch
- Charging time: 4-5 hours (constant current)



CE RoHS

Product Summary

The CED 20W Rechargeable USB Floodlight has an innovative fold flat design which offers the user the ideal storage solution for both around the home or in a vehicle. Featuring the latest 20W SMD which is highly energy efficient.

This work light provides a bright glare free 1400 Lumen light output and is cool to the touch. Comes with a lightweight replaceable heavy-duty Lithium-ion battery that provide up to 7 hours of continuous light on one full charge, depending on the mode selected.

It is also complemented with a USB power outlet allowing the user to recharge many portable electronic devices such as MP3 players or mobile phones. It also comes with a ratcheting leg stand system that allows the lamp to be folded flat for storage and opened out for use. Supplied complete with both a mains charger and a car charger unit.

Min/Box quantity: 1

Minimum order quantity: 1

Each

Technical Specifications

General Information	
Product Colour	Black
Dimensions (mm)	192x172x57mm
Ingress Protection (IP)	IP54
Electrical	
Operating Voltage (V)	5V 1A USB output
Frequency (Hz)	n/a
Wattage (W)	20W (rechargeable)
Approvals	CE, RoHS
Performance Data	
Useful Lumen Output	1400Lm
Lumens (Per Watt)	70Lm
Lampholder	None
Lamp Type	Dedicated LED
LED Type	SMD2835
Number of LED (pcs)	40
Beam Angle (°)	120°
Colour Temperature (K)	4000k
Construction	
Body	Plastic
Diffuser Material	Glass (clear)
Weight	910g
Warranty (Years)	1yr
Other	
Applications	Domestic, commercial applications



CED
ELECTRICAL
GROUP

44-48 FRESHWATER ROAD,
DAGENHAM, ESSEX RM8 1RX (UK)

020 8503 8500

020 8503 8900

www.cedelectrical.co.uk

info@cedelectrical.co.uk